


Name	DUALFLOW PLUS - HAND DRYER		
Product Code	HDR-WHT-M14A		
General description	<ul> <li>The Dualflow Plus is a fast, energy efficient, ecologic, hygienic &amp; stylish hand dryer.</li> <li>"Hands in" model, it has 2 pairs of IR sensors on both sides of the upper covers for instant hand detection</li> <li>Maximum air speed 410 Km/h.</li> <li>Dries hands in only 8 / 15 seconds.</li> <li>Motor power adjustable, allowing electricity consumption to be regulated (between 420 and 1.500W).</li> <li>Biocote antimicrobial and antibacterial protection technology based on silver ions. These ions inhibit the reproduction of micro-organisms in the product throughout its lifetime.</li> <li>30 seconds safety timer.</li> <li>Lowest noise level in its category. (62 dBA in ECO mode).</li> <li>Suitable for medium and high traffic facilities.</li> <li>Easy maintenance.</li> </ul>		
Technical Specifications			
Voltage		220- 240 V	
Frequency		50/60 Hz	
Electrical Isolation		Class I	
Total power		420 – 1.500 W	
Consumption		3.2 – 6.4 A	
Motor power		420 – 1,500 W	
Rpm		19,000 – 30,000	
Heating element power		400 or 0 W (ON/OFF switch)	
Dimensions		665x320x228 mm	
Weight		8,3 Kg	
Cover thickness		3 mm	
Drying time		8-15 seg.	
Effective airflow		94-165m3/h -1,570-2,750 l/min	
Air velocity		234 – 410 Km/h	
Air temperature (10 cm distance/21°C)		40 °C	
Sound pressure (*) (at 2m)		62 – 72 dBA	
Protection rating		IPX4	
(*) According to UNE EN ISO 11201:2010 V2 standard.			

Components & materials			
M14A	ABS cover, white finish.		
Cover	made of high impact ABS.		
Base Plate	made of plastic PA6V0.		
Motor	high speed class F universal brush motor, adjustable from 19000 to 30000 rpm, allowing electricity consumption and sound pressure to be regulated.		
Heating Element	minimum waved wire NiCr heating element of 400W, mounted on a mica frame that incorporates a self-resetable thermal cut-off which disconnect the whole appliance. The heating element can be disconnected by means of an ON/OFF switch.		
Hepa Filter Media	cartridge that holds an HEPA filter medium that filters suspended solid particles (pollen, dust mites, cigarette smoke, etc.), notably improving the air quality. Furthermore, this cartridge also contains and activated carbon filtering medium that neutralizes odours and absorbs fumes and gases, helping avoid bad odours.		
Ionizer	cleans and purifies the air through negative ions (anions) which remove microscopic particles from the air making it healthier (optional).		
Connection To The Waste Pipe	optionally, and by means of a kit for the connection to the waste pipe, code KITDESM14A, the Dualflow Plus can be connected directly to the waste pipe. Thus, the emptying of the water tank is eliminated because the water always goes directly to the waste pipe.		
Inner Tank	collects the water. It is removable and it has an external valve for easy emptying.  Optionally, and by means of a kit for the connection to the waste pipe, code  KITDESM14A, the Dualflow Plus can be connected directly to the waste pipe.		
Auto Check-In Lighting Panel	for fast diagnosis of the dryer (green - machine running, blue - full tank, red - check engine). Optical and acoustic warning of full tank.		
Odor Neutralizer	for a cleaner and more pleasant atmosphere in the bathroom. (optional).		
Operation	Place the hands between the air outflow valves, inside the hand dryer. The dryer will start automatically, and go on with no interruption as long as the hands are kept in the detection range of the sensor. Move the hands vertically in order to dry them completely. The appliance will stop 2 seconds after the hands are removed from the airflow		
Mounting	Recommended heights distance from the floor		





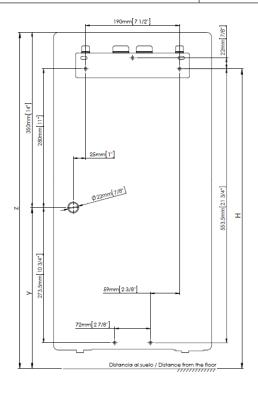



z =	92 cm (36 1/4")
H =	85 cm (33 1/2")

$$r = \frac{57 \text{ cm}}{(22 \text{ 1/2"})}$$

80 cm (31 1/2")